


LOW PROFILE HATCH

The new low profile hatch replaces the Coastline range and fits Lewmar's standard cut out sizes. The hatch is stronger than its predecessors and has softer, more fluid styling. The acrylic is replaceable without the use of sealant.



Low Profile Hatch Sizes

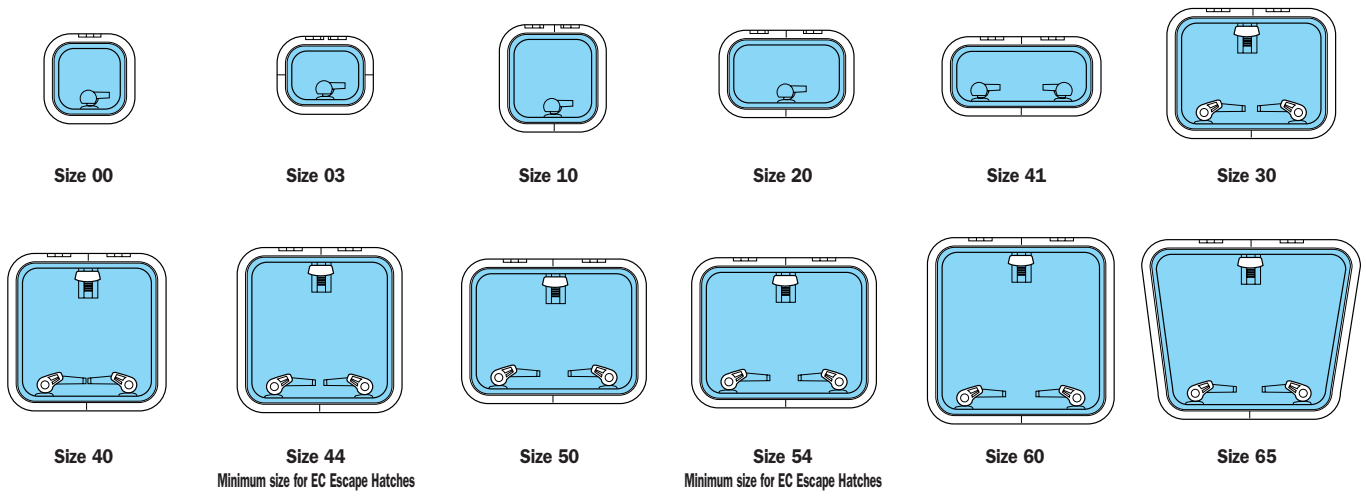

CE Approved The Lewmar Low Profile Hatch when used on Sailing Monohulls, Sailing Multihulls and Powerboats, installed as outlined below complies with International Standards ISO/DIS 12216.2(E)


Small Craft up to 24m. This standard covers the applicable essential safety requirements of the Recreational Craft Directive 94/25/EC.

Size	Area 2
All Sizes	✓

Note: Area 2 = Deck, Coachroof, Cockpit & Transom



Low Profile Round Hatch Sizes

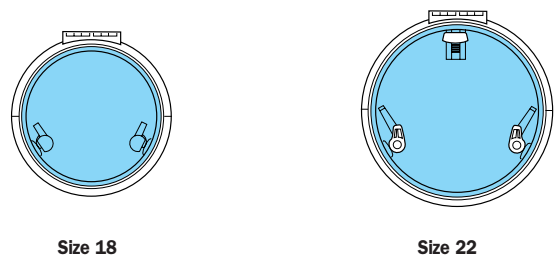

Low Profile Hatch Specifications

Part Number	Old Coastline Part Number	Size	Lower Frame Flange mm/in	Acrylic Colour	Frame Colour	Overall Size				Cut-Out Size Dimensions change if Trimkits are used			Wght kg/lb	Acrylic Window Thickness mm/in
						X Length mm/in	Y Width mm/in	Z Hght mm/in	R Rad mm/in	X1 Cut-Out Length mm/in	Y1 Cut-Out Width mm/in	R1 Cut-Out Rad mm/in		
39900030	39400070	00	15 5/8	Grey	Silver	281 11 1/8	281 11 1/8	25 1	77.5 3 1/8	211 8 3/8	211 8 3/8	42.5 1 1/2	1.6 3.5	8 5/8
39903030	39403070	03	15 5/8	Grey	Silver	246 9 11/16	301 11 7/8	25 1	77.5 3 1/8	176 6 15/16	231 9 1/8	42.5 1 1/2	1.6 3.5	8 5/8
39910030	39410070	10	15 5/8	Grey	Silver	330 12	330 12	25 1	77.5 3 1/8	260 10 1/4	260 10 1/4	42.5 1 1/2	2.2 4.9	8 5/8
39920030	39420070	20	15 5/8	Grey	Silver	272 10 11/16	417 16 3/8	25 1	77.5 3 1/8	202 7 15/16	347 13 1/2	42.5 1 1/2	2.3 5.1	8 5/8
39930030	39540070	30	15 5/8	Grey	Silver	397 15 5/8	527 20 3/4	25 1	77.5 3 1/8	327 12 3/4	457 18	42.5 1 1/2	3.9 8.6	8 5/8
39940030	39540070	40	15 5/8	Grey	Silver	491 19 3/8	491 19 3/8	25 1	77.5 3 1/8	421 16 5/8	421 16 5/8	42.5 1 1/2	4.6 10.1	8 5/8
★ 39941030	39441070	41	15 5/8	Grey	Silver	246 9 11/16	491 19 3/8	25 1	77.5 3 1/8	176 6 15/16	421 16 5/8	42.5 1 1/2	2.5 5.5	8 5/8
39944030	39544070	44	15 5/8	Grey	Silver	512 20 1/2	512 20 1/2	25 1	77.5 3 1/8	442 17 3/8	442 17 3/8	42.5 1 1/2	4.8 10.6	8 5/8
39950030	39550070	50	15 5/8	Grey	Silver	447 17 5/8	577 22 3/8	25 1	77.5 3 1/8	377 14 13/16	507 19 15/16	42.5 1 1/2	4.8 10.6	8 5/8
39954030	39554070	54	15 5/8	Grey	Silver	462 18 3/8	577 22 3/8	25 1	77.5 3 1/8	392 15 3/8	507 19 15/16	42.5 1 1/2	4.9 10.8	8 5/8
39960030	39560070	60	15 5/8	Grey	Silver	577 22 3/8	577 22 3/8	25 1	77.5 3 1/8	507 19 15/16	507 19 15/16	42.5 1 1/2	6.4 14.1	10 3/4
★ 39965030	39565070	65	15 5/8	Grey	Silver	560 22 1/4	max 675 min 560 max 26 1/8 min 22 1/8	25 1	77.5 3 1/8	See Drawing Below		42.5 1 1/2	6.5 14.3	10 3/4

Low Profile Round Hatch Specifications

Part Number	Old Coastline Part Number	Size	Lower Frame Flange mm/in	Acrylic Colour	Frame Colour	Overall Size			Cut-Out Size Dimensions change if Trimkits are used			Acrylic Window Thickness mm/in	
						Ø Dia mm/in	Z Hght mm/in	HX Hinge Length mm/in	HY Hinge Width mm/in	Ø1 Dia mm/in	Hatch Wght kg/lb		
39918030	39518070	18	15 5/8	Grey	Silver	490 19 5/8	25 1	Apply to Lewmar for details			420 16 1/8	3.8 8.4	8 5/8
39922030	39522070	22	15 5/8	Grey	Silver	588 23 1/2	25 1	Apply to Lewmar for details			518 20 3/8	5.8 12.8	10 3/4

● Hatches should be fitted to a flat surface with a maximum tolerance of ±1mm.
Part No's marked with a ★ are made to order.

● Fastening size at the hinge section use M6 (1/4").
● Fastening size for lower frame section use 5mm CSK screw No. 10 UNC 2BA.
● backing plate part number 360061909 (M6) or 360062909 (1/4").

Trimkits

- UV resistant flyscreen prevents mosquitoes entering yachts interior.
- ABS plastic trims in ivory or white and new alloy trimkits in silver or white.
- For further information see page 144.



Low Profile Hatch Dimensions

